


# FRS232

## Communication Module RS232

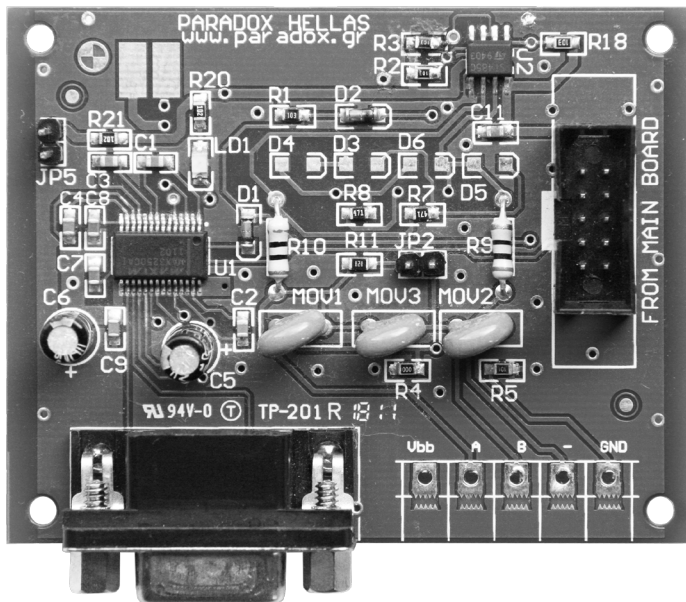

### Technical Characteristics

Operation voltage	5 VDC
Maximum current consumption	100mA
Serial Port	Compatible with RS232 (galvanic isolated)
Maximum voltage galvanic isolation	50V (Red LED for threshold indication)
Operating Temperature	From 0°C to 50°C
Ambient humidity	95% max.
Dimensions	7.4 x 5.8cm

The FRS232 module provides connection capability to Fighter Panels from a local PC via a serial port.

Operations and control of the system is possible via the PC with the help of the specially designed software named ProVision.

The module provides galvanic isolation between the installation's protective earth (PC's ground) and system ground preventing an earth fault problem.

**PARADOX HELLAS S.A.**  
**fire alarm & security systems**

Korinthou 3, Metamorfosi 144 51 - Athens, Greece

[www.paradox.gr](http://www.paradox.gr)